
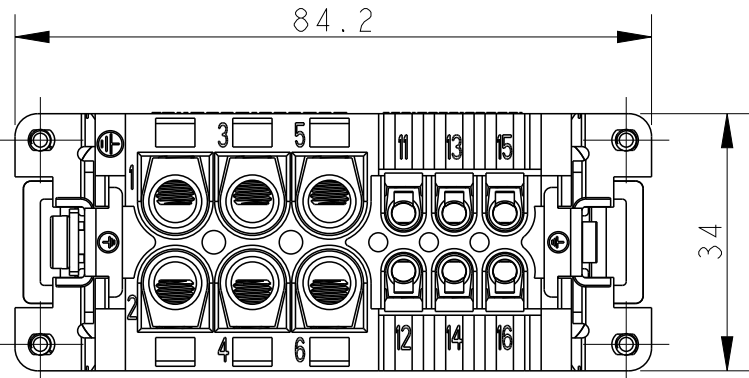
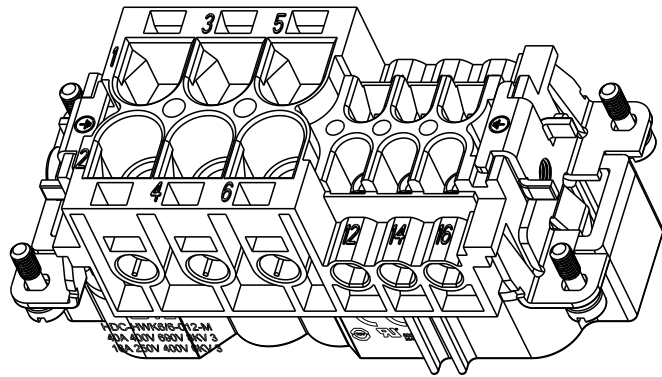
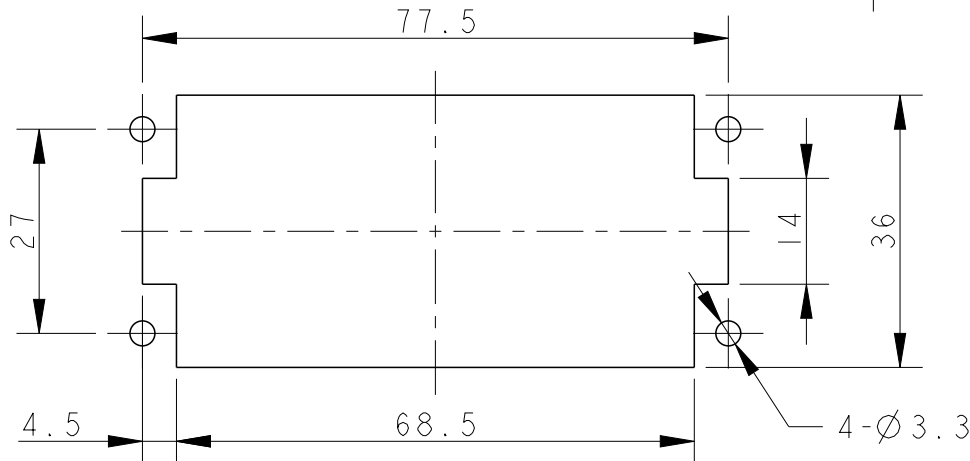
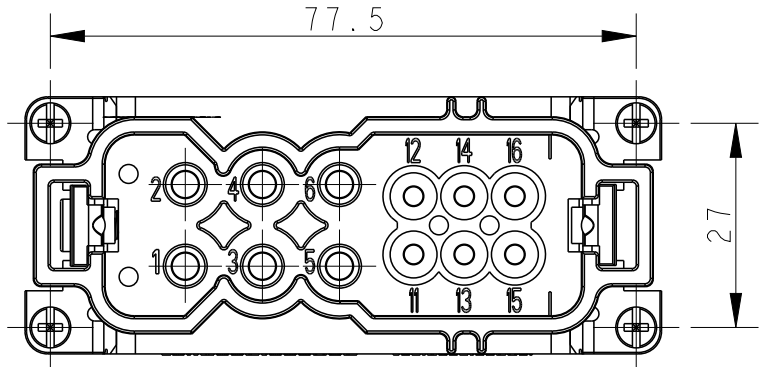


M4 THREAD
RECOMMENDED TIGHTENING TORQUE 1.2Nm

4 X M3 THREAD
RECOMMENDED TIGHTENING TORQUE 0.5Nm

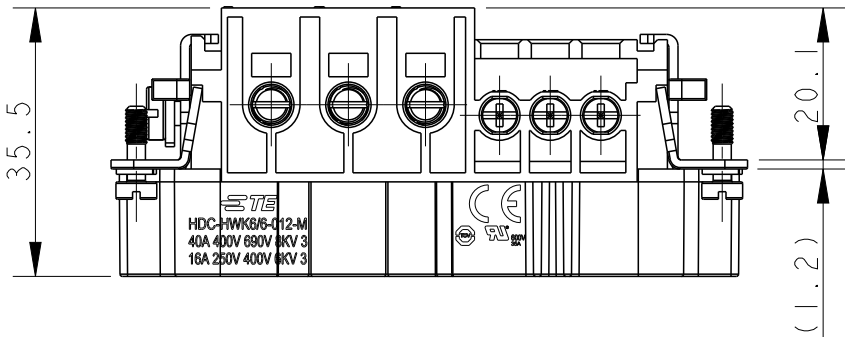

PANEL CUT OUT FOR INSERTS FOR USING
WITHOUT HOODS/HOUSINGS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.15 1 PLC ±0.15 2 PLC ±0.15 3 PLC ±0.15 4 PLC ±0.15 ANGLES ±0.5
MATERIAL	FINISH
-	-

DWN	DAVID LI	07APR2015
CHK	CHRIS WANG	07APR2015
APVD	XU XIANG	07APR2015
PRODUCT SPEC	108-137126	
APPLICATION SPEC	114-137126	
WEIGHT	-	
CUSTOMER DRAWING		

T2106062101-000	HWK6/6-012-M HWK6/6-012 公插
PART NUMBER 料号	PART DESCRIPTION 描述
NAME HDC-HWK6/6-012-M	
SIZE A3	CAGE CODE -
DRAWING NO T2106062101000	
RESTRICTED TO -	
SCALE 1:1	SHEET 1 OF 1
REV D	

NOTES:

1. TECHNICAL CHARACTERISTICS:

INSULATION MATERIAL: PC

RATED VOLTAGE: POWER: CONDUCTOR-CONDUCTOR: 690 V;
CONDUCTOR-GROUND: 400 V
SIGNAL: CONDUCTOR-CONDUCTOR: 400 V;
CONDUCTOR-GROUND: 250 V

RATED CURRENT: POWER: 40 A; SIGNAL: 16 A

INSULATION RESISTANCE: $\geq 400M\Omega$

RATED IMPULSE VOLTAGE: POWER: 6 KV; SIGNAL: 4 KV

POLLUTION DEGREE: 3

FLAMMABILITY: UL94V-0

MATING CYCLES: 500

OPERATION TEMPERATURE: -40-+125°C

WIRE RANGE: POWER: 2.5-10.0 mm² (14-7 AWG)
SIGNAL: 0.5-2.5 mm² (16-14 AWG)

CONTACT FINISH: SILVER PLATED

CONTACT TYPE: SCREW CONTACT

注释:

1. 技术参数:

绝缘材料: PC

额定电压: 电源: 导体-导体: 690V; 导体-地: 400V;
信号: 导体-导体: 400V; 导体-地: 250V;

额定电流: 电源: 40A; 信号: 16A

绝缘电阻: $\geq 400M\Omega$

额定脉冲电压: 电源: 6 KV; 信号: 4 KV

污染等级: 3

阻燃等级: UL94V-0

插拔次数: 500次

工作温度: -40-+125°C

接线范围: 电源: 2.5-10.0 mm² (14-7 AWG)
信号: 0.5-2.5 mm² (16-14 AWG)

端子表面处理: 镀银

接线类型: 螺丝压接